


Cell Type UR16650ZT

Specifications

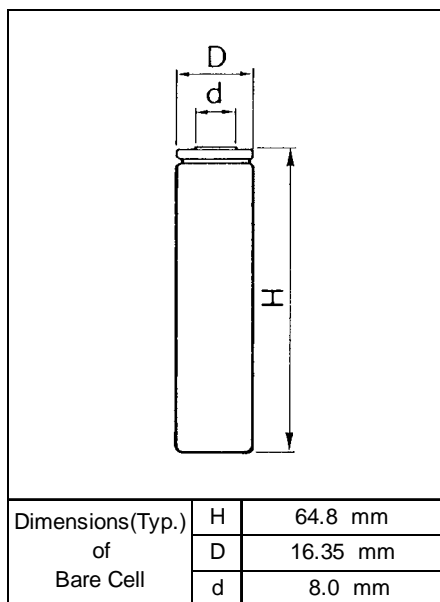


Discharged State after Assembling

| | | |
|----------------------------|-----------|---------------------------------------|
| Nominal Capacity | | Min.2100mAh |
| Nominal Voltage | | 3.7V |
| Charging Method | | Constant Current -Constant Voltage |
| Charging Voltage | | 4.3V |
| Charging Current | | Std.1470mA |
| Charging Time | | 3.0hrs. |
| Ambient Temperature | Charge | 0 ~ +40 |
| | Discharge | -20 ~ +60 |
| | Storage | -20 ~ +50 |
| Weight (Max.) | | 40.0g |
| Dimensions (Max.) | (D) | 16.39mm |
| | (H) | 64.90mm |
| Volumetric Energy Density | | 567Wh/l |
| Gravimetric Energy Density | | 194Wh/kg |


*Maximum size without tube

Typical Characteristics

Discharge rate characteristics

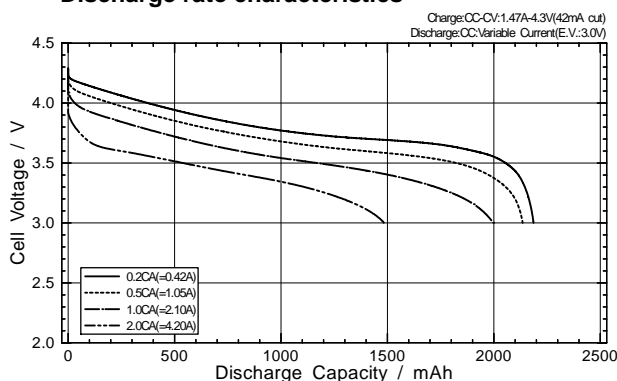

Discharge temperature characteristics

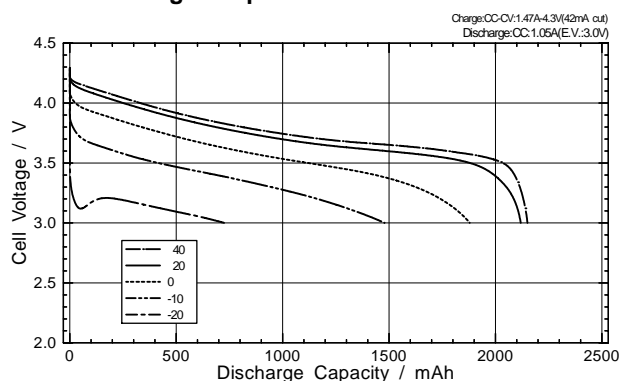

Charge characteristics

